



Standard

TL-5530 – 3ton portable lift




Model: TL-5530

Product: 3ton portable lift

Description: The Easy lift is our heaviest-duty portable car and truck lift system. A reinforced upper frame rails give this lift enough strength to effortlessly raise SUVs. The Easy Lift portable lifting system makes vehicle maintenance on and off the track convenient and lightening fast! The easy lift can go anywhere and is easily stowed in the trunk or back seat of most cars. Bring it to the track, or drop it on your garage floor to perform routine maintenance in the comfort of your home all in seconds. The Easy Lift replaces clumsy floor jacks and unstable jack stands with a safe, durable and convenient vehicle jacking and support system. Simply position the lightweight jack frames under the vehicle, push the raise button on the hand-held control and in seconds the entire car is about 546mm of the ground ready for tyre changes, chassis tuning or other maintenance. The ruggedly built frame collapse to a low 91mm profile, so they fit where other jacks don't. With Easy Lift, practicality and portability become a reality. Because the Easy jack is void of any cross-members, it provides total under-car access and can be installed at a width that best suits the vehicle being raised.


Features:	Benefits:
Automatic safety locks	Lower and upper safety locks automatically engage as the car lift frames rise. They quickly disengage with a simple flip of the lock bar. They're like built-in, heavy-duty jack stands.
Zero leak fittings	Even when the car lift frames are under a full 3ton load, the hydraulic connectors do not leak. Keep your nice garage flooring clean and oil-free.
Reinforced upper frame rails	For the Easy lift, our largest-capacity car lift system, we reinforced the upper frame rails of with box-welded steel. This significantly minimizes deflection, improving power without requiring longer frames.
Open center design	The Easy lift is all about more power with less interference. Inspired by two-post car lifts that engage vehicle frames, our open-center design offers full access to your vehicle's wheels and undercarriage
Dynamic test 115% of the rated capacity	Ensures the hoist works correctly through its full cycle of operation
Static test: 150% of the rated capacity	Static load testing, to ensure the lifts can handle the recommended tonnage. Safety test.
Quality power rack	Ensures safety at all heights.

Conforms to CE requirements	The CE Mark on a product or machine identifies it as complying with all the of safety requirements established by the European Union.
Easy to install	Lift can be installed in a workshop, can also be used as a mobile unit.
Training available	Technicians can be professionally trained to use the machine and get the maximum benefit from it.
1 year warranty	The machine will be repaired if there are any factory faults and can be replaced if required.
Spares available	Should you have a breakdown you will not have to wait for your machine to be repaired. If there is anything we don't have, we fly it in directly from the Suppliers.
Operational videos	Technicians can learn how to operate the machine by watching a video, which is easier and more simple than written instructions.

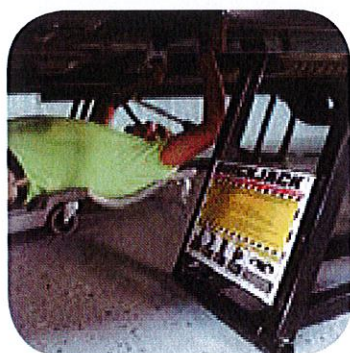

Technical information	
Lifting capacity	3 ton
Individual frame weight	44 kg
Raised (frame only)	462 mm
Raised (stacked blocks)	546 mm
Collapsed	91 mm
Lifting point spread - min	951 mm
Lifting point spread - max	1676 mm
Frame width	318 mm
Frame length	1930mm
Lifting time	15-30 seconds



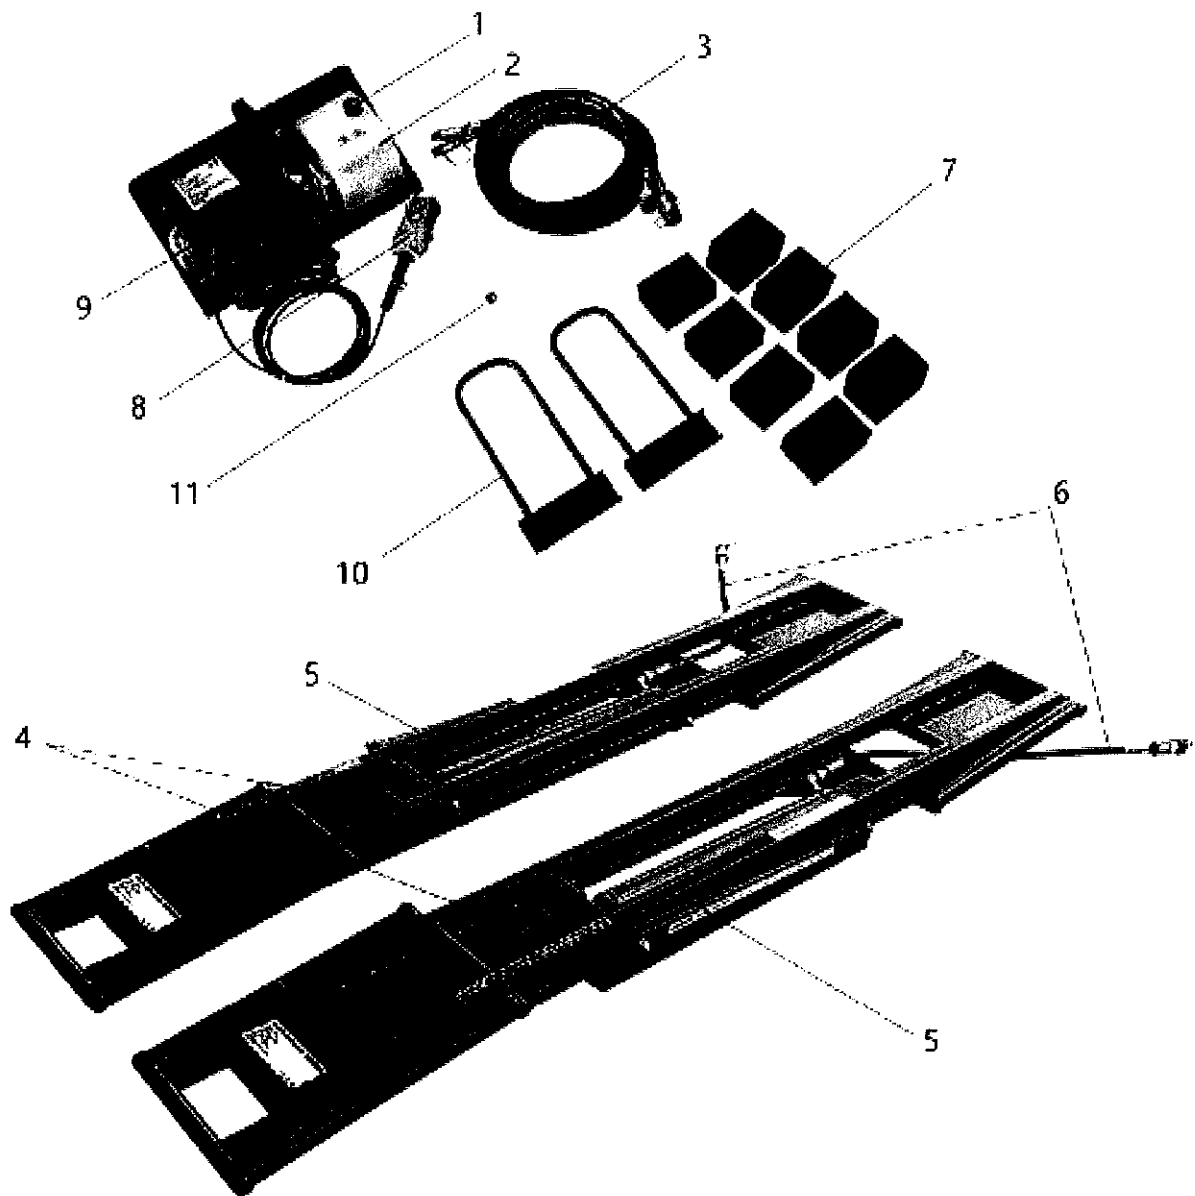

1. Filler plug for hydraulic Fluid
2. Hydraulic fluid reservoir
3. Long hydraulic Hoses with couplers (X2)
4. Lifting frames (X2)
5. Safety Lock bar (X2)
6. Short hydraulic hoses with couplers (X2)
7. Rubber lifting blocks 55mm (X4) and 75mm(X4)
8. Remote control
9. Hydraulic power unit
10. Positioning handle
11. Seal Plug for hydraulic reservoir